


USER'S MANUAL MODEL 8963 - MOON PHASE

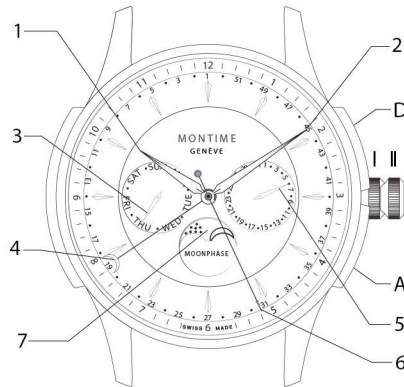

Dial and hand setting:

- 1 HOUR hand
- 2 MINUTE hand
- 3 WEEKDAY hand
- 4 CALENDAR WEEK hand
- 5 DATE hand
- 6 SECOND hand
- 7 Dial, position of moon indicator

Full moon dates

	2015	2016	2017	2018	2019
JAN	05	24	12	02/31	21
FEB	04	22	11		19
MAR	05	23	12	02/31	21
APR	04	22	11	30	19
MAY	04	21	10	29	18
JUN	02	20	09	28	17
JUL	02/31	19	09	27	16
AUG	29	18	07	26	15
SEP	28	16	06	25	14
OCT	27	16	05	24	13
NOV	25	14	04	23	12
DEC	25	14	03	22	12

Pos. I Position of rest (watch running)

Pos. II During the blocking time mentioned below, automatic changes are in progress. Pressing the pusher during the blocking time may damage the movement.

- Pusher A (quick-change correction for the day of the week) must not be pressed during the blocking time from approx. 11.30 pm-5.30 am.
- Pusher D (quick-change correction for the calendar week) must not be pressed during the blocking time from Sunday-Monday.

Setting sequence for: moonphase display, date, day of the week and time (e.g. after battery change)

1. Pull the crown out to position II (Watch stopped).
2. Set moonphase display:
 - Turn the crown clockwise past midnight, until the full moon appears.
3. Set the day of the week:
 - There is no quick-change correction available to change the day of the week, and so the day of the week must be changed as follows. Change the time display by turning the crown backwards and forwards (01.00am/10.00pm/01.00am/10.00pm/01.00am...), until the day of the week of the last full moon is displayed.

4. Set the date:

- Turn the crown until 06.00 am appears in the time display(= beyond the blocking time).
- Set the date of the last full moon with pusher A. Then with the crown move the hands forwards until the current date is displayed.

5. Set the time:

- Turn the crown, until the current time is displayed (NB remember the 24-hours cycle!).

6. Set the calendar week:

- Using pusher D, set the current calendar week (blocking period Sunday-Monday)

7. Push the crown back into position I.

Quick-change correction for the date:

Press pusher A, until the current date is displayed (remember the blocking period between 11.30 pm-5.30 am).

Quick-change correction for the calendar week:

Press pusher D, until the current calendar week is displayed (remember the blocking period between Sunday-Monday).